
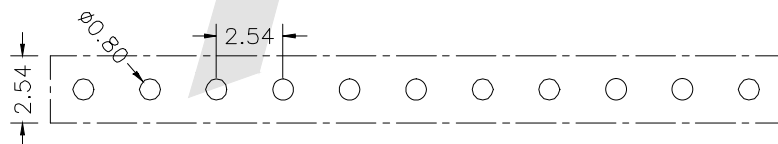
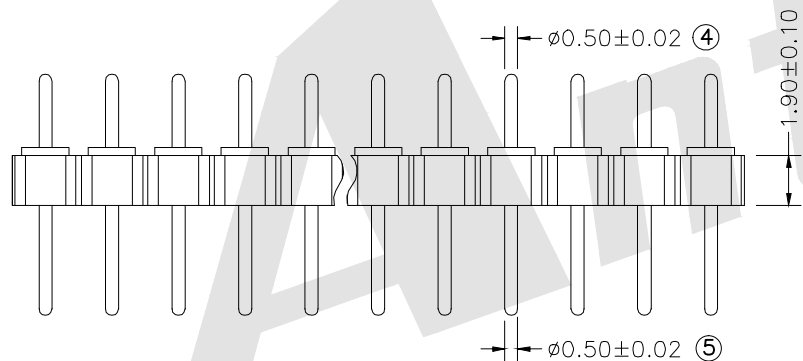


HSF

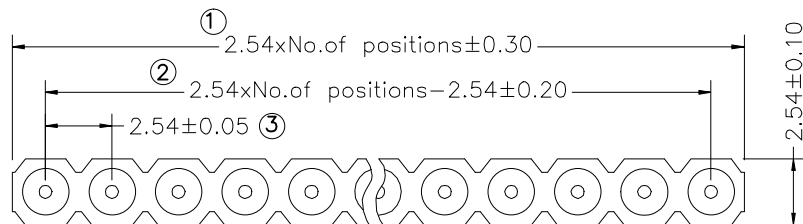

P. C. B LAYOUT

Technical Date

Material:

Pin(outer sleeve)Brass,machined CuZn38Pb2

Plating(outer sleeve)

Tin Plated:2m/80 μ " N, 5 μ m/200 μ " Sn

Gold Pated: 2 μ m/80 μ " N, 0.8 μ " gold

Insulator: PPS UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Current resistance: ≤4mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical LifeCycle: min 500

Operating Temperature: -40° C to+105°

Soldering Temperature: +255°

Ordering Code:

MPHES	-	X	-	X	-	X	-	10
①		②		③		④		⑤

① MPHES series

② Contact NO:

XX=XXpin

For example:

06=06pin

③ Pin Plated

0: No

1: Tin 150 μ "

2: Tin 200 μ "

3: G/F

4: Gold 3 μ "

5: Gold 10 μ "

6: Gold 15 μ "

S: Special

⑤ Packing


A:Tray B:Bag

C:Tube D:Tape Reel

⑥ Series number

10

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
Mo Guo XuanDATE
10/12/2018CHECK
BobYangDATE
10/12/2018

3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

Machined Pin connectors 2.54 mm:
MPHES series

DRAWING NO:

MPHES-XXX10

PRODUCT NO:

MPHES-XXX10

REV

DESCRIPTION

DATE